






VF680

Face Recognition Reader for Time Attendance and Access Control

Advanced Features



Specification

Image Sensor

- Special Stereo Dual Sensor

Display

- 3 Inch Touch Screen

Face Capacity

- 800(1:N)

ID Card Capacity

- 10,000

Logs Capacity

- 100,000

Communication

- TCP/IP, USB Port

Standard Functions

- ID Card, Automatic Status Switch, Self-Service Query, Work Code, T9 Input, 9 Digit User ID, DLST

Optional Functions

- Mifare Card

Power Supply

- 12V/1.5A

Verification Speed

- < 2 seconds

Operating temperature

- 0°-40°C (Indoor)

Operating Humidity

- 20%-80%

Dimensions(L×H×D)

- 11.0cm(L) × 3.6cm(W) × 16.0cm(H)


What is VF680

VF680 is a new generation facial identification terminal, with Face, RFID and PIN Recognition mode. It holds 800 face templates without dividing groups, and its verification time is less than 1 Second. All setting operations are easily done on 3.0 inches TFT touch screen. The elegant and small size design can fit with your office.


Installation & Communication Diagram

*TCP/IP (cat5e) or USB Thumb Drive (Selectable)
*for illustration only

Access Control

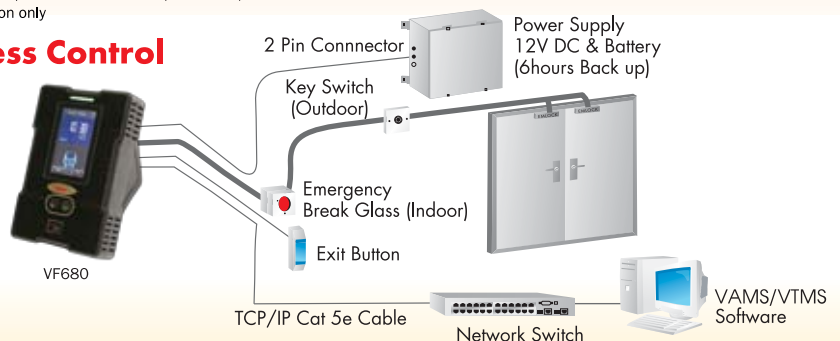

Time Attendance

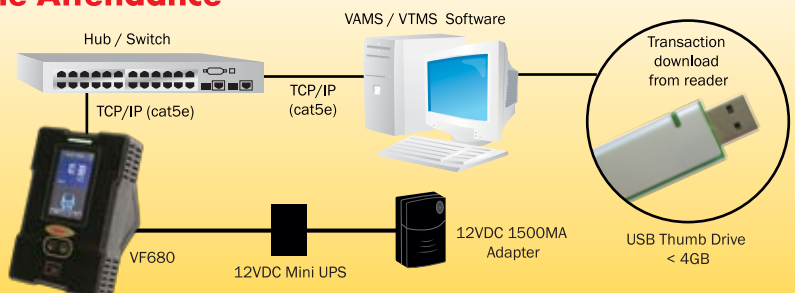

All product's informations / specifications are subject to change without prior notice.

© 2014-2019 Vigilance Security Sdn Bhd. All rights reserved.
www.vigilance.com.my