

DHI-XVR5104H-4M

4 Channel Penta-brid 4MP Mini 1U Digital Video Recorder



- Embedded processor
- H.264+/H.264 dual-stream video compression
- Support HDCVI/AHD/TVI/CVBS/IP video inputs
- Max 6/ channels IP camera inputs, each channel up to 5MP; Max 24Mbps Incoming Bandwidth
- Smart Search and Intelligent Video System



System Overview

Throughout the years, HDCVI technology gained international fame for becoming a brand new international standard for video surveillance, and has never stopped evolving. From 2MP to 4MP, now Dahua Technology brings HDCVI into the 4K era. It presents a much clear and vivid world.

As the perfect solution to upgrade existing video surveillance systems, XVR supports penta-brid access technology such as HDCVI, AHD, TVI, CVBS and IP to effortlessly integrate with popular industry formats, offering an affordable solution loaded with flexible options.

Designed as a full compatibility product, XVR is able to provide end user the simplicity of analog system, namely lower system cost, simple installation and use of existing cable. It is ideal for a wide range of applications such as public safety, retail store, transportation, home protection and education.

Functions

Smart H.264+

Smart Codec, H.264+ can reduce up to 70% bit rate and storage requirements without having to invest in new cameras.

HDCVI/AHD/TVI/CVBS Auto-detect

The XVR can auto recognize the signal of front-camera without any setting. It makes operation more friendly and convenient.

Coaxial Audio/Upgrade/Alarm

The integrated design can reduce wiring troubles which makes it much more cost-effective and convenient for installation.

Intelligent Fan Design

The intelligent fan can automatically turn on or turn off according to the CPU temperature. This function can effectively reduce the fan noise to provide a better user experience while extending the life of the fan at the same time.

Intelligent Video System (IVS)

With built-in intelligent video analytics, the XVR has the ability to detect and analyze moving objects for improved video surveillance. The XVR provides optional standard intelligence at the edge allowing detection of multiple object behaviors such as abandoned or missing objects. IVS also supports Tripwire analytics, allowing the camera to detect when a pre-determined line has been crossed.

Face Detection

It is a type technology being used in a variety of applications that search or identify individuals which show front cameras.

Smart Search

This function helps you get more motion detect video during a short time through drawing a region when playback. It is very useful when an emergency occurs.

Technical Specification

System

| | |
|------------------|--------------------|
| Main Processor | Embedded Processor |
| Operating System | Embedded LINUX |

Video and Audio

| | |
|---------------------|---|
| Analog Camera Input | 4 Channel, BNC |
| HDCVI Camera | 4MP, 1080P@25/30fps, 720P@50/60fps, 720P@25/30fps |
| AHD Camera | 5MP, 4MP, 3MP, 1080P@25/30, 720P@25/30fps |
| TVI Camera | 5MP, 3MP, 1080P@25/30, 720P@25/30fps |
| CVBS Camera | PAL/NTSC |
| IP Camera Input | 4+2 Channel, each channel up to 5MP |
| Audio In/Out | 1/1, RCA |
| Two-way Talk | Reuse audio in/Out, RCA |

Recording

| | |
|-----------------|--|
| Compression | H.264+/H.264 |
| Resolution | 4MP, 3MP, 1080P, 720P, 960H, D1, CIF, QCIF |
| Record Rate | Main stream: 4MP/3MP(1~15fps); 1080P/720P/960H/D1/CIF/QCIF (1~25/30fps) Sub stream:960H(1~12fps); D1/CIF/QCIF(1~25/30fps) |
| Bit Rate | 1Kbps ~ 6144Kbps Per Channel |
| Record Mode | Manual, Schedule (Regular, Continuous), MD (Video detection: Motion Detection, Video Loss, Tampering), Alarm, Stop |
| Record Interval | 1 ~ 60 min (default: 60 min), Pre-record: 1 ~ 30 sec, Post-record: 10 ~ 300 sec |

Display

| | |
|----------------------|--|
| Interface | 1 HDMI, 1 VGA |
| Resolution | 2560x1440, 1920x1080, 1280x1024, 1280x720, 1024x768 |
| Multi-screen Display | When IP extension mode not enabled: 1/4 When IP extension mode enabled: 1/4/6 |
| OSD | Camera title, Time, Video loss, Camera lock, Motion detection, Recording |

Network

| | |
|------------------|---|
| Interface | 1 RJ-45 Port (100M) |
| Network Function | HTTP, TCP/IP, IPv4/IPv6, UPnP, RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, PPPoE, DDNS, FTP, Alarm Server, P2P, IP Search (Support Dahua IP camera, DVR, NVS, etc.) |
| Max. User Access | 128 users |
| Smart Phone | iPhone, iPad, Android |
| Interoperability | ONVIF 2.42, CGI Conformant |

Video Detection and Alarm

| | |
|-----------------|--|
| Trigger Events | Recording, PTZ, Tour, Video Push, Email, FTP, Snapshot, Buzzer and Screen Tips |
| Video Detection | Motion Detection, MD Zones: 396 (22 x 18), Video Loss, Tampering and Diagnosis |
| Alarm input | N/A |
| Relay Output | N/A |

Playback and Backup

| | |
|-------------------|---|
| Playback | 1/4 |
| Search Mode | Time /Date, Alarm, MD and Exact Search (accurate to second) |
| Playback Function | Play, Pause, Stop, Rewind, Fast play, Slow Play, Next File, Previous File, Next Camera, Previous Camera, Full Screen, Repeat, Shuffle, Backup Selection, Digital Zoom |
| Backup Mode | USB Device/Network |

Storage

| | |
|--------------|---------------------------------|
| Internal HDD | 1 SATA Port, up to 8TB capacity |
| eSATA | N/A |

Auxiliary Interface

| | |
|-------|-------------------------|
| USB | 2 USB Ports (2 USB 2.0) |
| RS232 | N/A |
| RS485 | 1 Port, for PTZ Control |

Electrical

| | |
|-------------------|--------------------|
| Power Supply | DC12V/2A |
| Power Consumption | <10W (Without HDD) |

Construction

| | |
|--------------|--|
| Dimensions | Mini 1U, 325mmx255mmx55mm (12.8" x 10" x 2.2") |
| Net Weight | 1.5kg (3.3 lb) (without HDD) |
| Gross Weight | 2kg (4.4lb) |
| Installation | Desktop installation |

Environmental

| | |
|----------------------|---|
| Operating Conditions | -10°C ~ +55°C (+14°F ~ +131°F), 0~ 90% RH |
| Storage Conditions | -20°C ~ +70°C (-4°F ~ +158°F), 0~ 90% RH |

Third-party Support

| | |
|---------------------|---|
| Third-party Support | Dahua, Arecont Vision, AXIS, Bosch, Brickcom, Canon, CP Plus, Dynacolor, Honeywell, Panasonic, Pelco, Samsung, Sanyo, Sony, Videotec, Vivotek, and more |
|---------------------|---|




Certifications

| | |
|----------------|--|
| Certifications | FCC: Part 15 Subpart B |
| | CE: CE-LVD: EN 60950-1/IEC 60950-1 CE-EMC: EN 61000-3-2, EN 61000-3-3, EN 55032, EN 50130, EN 55024 |
| | UL: UL 60950-1 |

Ordering Information


| Type | Part Number | Description |
|---------------|-----------------|---|
| 4 Channel XVR | DHI-XVR5104H-4M | 4 Channel Penta-brid 4MP Mini 1U Digital Video Recorder |

Dimensions (mm)



Rear Panel

DHI-XVR5104H-4M

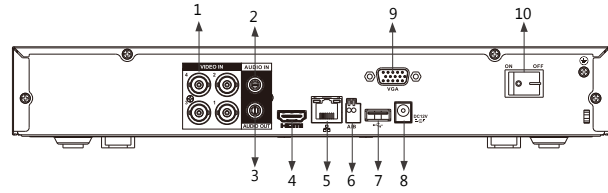

- | | | | |
|---|--------------------------|----|--------------------|
| 1 | VIDEO IN | 6 | RS485 Interface |
| 2 | AUDIO IN, RCA Connector | 7 | USB Interface |
| 3 | AUDIO OUT, RCA Connector | 8 | DC 12V Power Input |
| 4 | HDMI Interface | 9 | VGA Interface |
| 5 | Network Interface | 10 | Power Switch |