

## DH-NVR608/608R-64-4KS2

64 Channel Super 4K H.265 Network Video Recorder



### Features

- Max 64 channel IP cameras connection
- Max 384Mbps incoming bandwidth
- Up to 12Mp resolution preview& playback
- 1 VGA+2 HDMI
- Support RAID 0/1/5/6/10/50/60
- Support N+M hot standby
- Support iSCSI to expand storage space
- Compatible with Dahua SDK and seamless integrated to other platforms
- Support Multi-brand network cameras: Dahua, Arecont Vision, AXIS, Bosch, Brickcom, Canon, CP Plus, Dynacolor, Honeywell, Panasonic, Pelco, Samsung, Sanyo, Sony, Vivotek and etc.
- ONVIF Version 2.4 conformance
- Redundant power supply module adopted (DH-NVR608R-64-4KS2)

# DH-NVR608/608R-64-4KS2

## Technical Specifications


Model	DH-NVR608-64-4KS2	DH-NVR608R-64-4KS2
<b>System</b>		
Main Processor	Intel Processors	
Operating System	LINUX	
<b>Video&amp; Audio</b>		
IP Camera Input	64 channel	
Two-way Talk	1 channel Input, 1 channel Output, RCA	
<b>Display</b>		
Interface	2 HDMI (up to 3840×2160), 1 VGA	
Resolution	3840×2160, 1920×1080, 1280×1024, 1280×720, 1024×768	
Multi-screen Display	The 1 <sup>st</sup> screen: 1/4/8/9/16/25/36	
	The 2 <sup>nd</sup> screen: 1/4/8/9/16	
OSD	Camera title, Time, Video loss, Camera lock, Motion detection, Recording	
<b>Recording</b>		
Compression	H.265/H.264/MJPEG	
Resolution	12Mp, 8Mp, 6Mp, 5Mp, 3Mp, 1080P, 1.3Mp, 720P & etc.	
Record Rate	384Mbps	
Bit Rate	1~ 20Mbps	
Record Mode	Manual, Schedule(Regular(Continuous), MD(Video detection: Motion detection, Camera blank, Video loss), Alarm), Stop	
Record Interval	1~120 min (default: 60 min), Pre-record: 1~30 sec, Post-record: 10~300 sec	
<b>Video Detection &amp; Alarm</b>		
Trigger Events	Recording, PTZ, Tour, Alarm out, Video Push, Email, FTP, Snapshot, Buzzer & Screen tips	
Video Detection	Motion Detection, MD Zones: 396(22×18), Video Loss & Camera Blank	
Alarm Input	16ch, low level effective, green terminal interface	
Relay Output	8ch, Relay contact(1A@24VDC), NO/NC programmable, green terminal interface	
<b>Playback &amp; Backup</b>		
Playback	128Mbps in Raid 5 mode 64Mbps in single HDD mode	
Search Mode	Time/Date, Alarm, MD & Exact search (accurate to second)	
Playback Function	Play, Pause, Stop, Rewind, Fast play, Slow play, Next file, Previous file, Next camera, Previous camera, Full screen, Repeat, Shuffle, Backup selection, Digital zoom	
Backup Mode	USB Device/Network/Internal SATA burner/eSATA Device	
<b>Network</b>		
Interface	2 RJ-45 ports (10/100/1000Mbps)	
Ethernet Port	2 Ethernet ports joint working or 2 independent 1000Mbps Ethernet ports	
Network Function	HTTP, TCP/IP, IPv4/IPv6, UPnP, RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, PPPoE, DDNS, FTP, Alarm Server, IP Search(Support Dahua IP camera, DVR, NVS and etc.)	
Max. User Access	128 users	
Smart Phone	iPhone, iPad, Android	
<b>Storage</b>		

## DH-NVR608/608R-64-4KS2


Internal HDD	8 SATA III ports, up to 48TB	
HDD Mode	Single, Raid 0/1/5/6/10/50/60 (Support global HDD hot-spare)	
<b>Auxiliary Interface</b>		
USB	4 USB ports(2 USB2.0, 2 USB3.0)	
eSATA	1 eSATA port	
RS232	1 port, For PC communication& keyboard	
RS485	1 port, For PTZ control	
<b>General</b>		
Power Supply	AC110V~240V, 50~60Hz	AC100V~240V, 50~60Hz, Redundant
Power Consumption	<20W (Without HDD)	
Working Environment	-10°C~+55°C/10%~90%RH/86~106kpa	
Dimension(W×D×H)	444mm(without ears)×457.1mm×95mm	444mm(without ears)×475mm ×95mm
Weight	9kg (without HDD)	
Installation	19" Rack-mounted	

### Rear Panel:

NVR608-64-4KS2

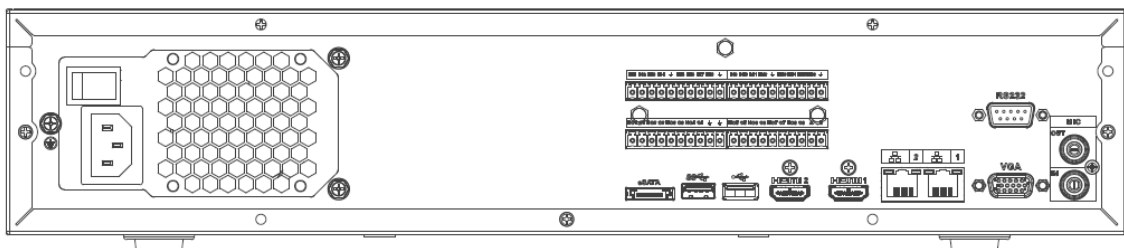

NVR608R-64-4KS2

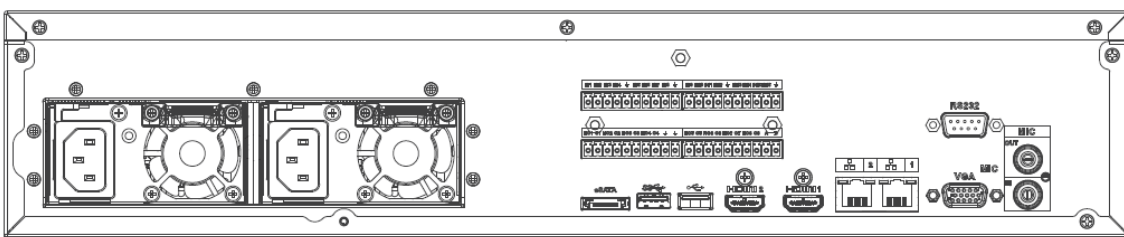

### Dahua Technology Co., Ltd.

1199' BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: overseas@dahuatech.com

www.dahuasecurity.com

\*Design and specifications are subject to change without notice.

© 2016 Dahua Technology Co., Ltd.